

Programming TMS320x28xx and 28xxx Peripherals in C/C++

Lori Heustess

AEC C2000

ABSTRACT

This application report explores a hardware abstraction layer implementation to make C/C++ coding easier on C28x™ devices. This method is compared to traditional #define macros and topics of code efficiency and special case registers are also addressed.

Contents

| | | |
|---|--|----|
| 1 | Introduction | 1 |
| 2 | Traditional #define Approach | 3 |
| 3 | Bit Field and Register-File Structure Approach | 5 |
| 4 | Bit Field and Register-File Structure Advantages | 11 |
| 5 | Code Size and Performance Using Bit Fields | 12 |
| 6 | Read-Modify-Write Considerations When Using Bit Fields | 16 |
| 7 | A Special Case: eCAN Control Registers | 21 |
| 8 | References | 22 |

List of Figures

| | | |
|---|---|----|
| 1 | SCI SCICCR Register | 8 |
| 2 | SCI SCICTL1 Register | 8 |
| 3 | Code Composer Studio 3.3 Autocomplete Feature | 11 |
| 4 | Code Composer Studio Watch Window | 12 |
| 5 | Peripheral Clock Control 0 Register (PCLKCR0) | 12 |

List of Tables

| | | |
|---|--|----|
| 1 | SCI-A, SCI-B Configuration and Control Registers..... | 3 |
| 2 | SCI-A and SCI-B Common Register File | 5 |
| 3 | CPU-Pipeline Activity For Read-Modify-Write Instructions in Example 13 | 14 |
| 4 | Read-Modify-Write Sensitive Registers..... | 20 |

1 Introduction

The TMS320x28xx and TMS328x28xxx are members of the C2000™ generation for embedded control applications. To facilitate writing efficient and easy-to-maintain embedded C/C++ code on these devices, Texas Instruments provides a hardware abstraction layer method for accessing memory-mapped peripheral registers. This method is the bit field and register-file structure approach. This application report explains the implementation of this hardware abstraction layer and compares it to traditional #define macros. Topics of code efficiency and special case registers are also addressed.

C28x, C2000 are trademarks of Texas Instruments.
 Code Composer Studio is a trademark of Texas Instruments Inc..
 All other trademarks are the property of their respective owners.

The hardware abstraction layer discussed in this application report has been implemented as a collection of C/C++ header files available for download from Texas Instruments:

- **Piccolo Series Microcontrollers**
 - 2802x C/C++ Header Files and Peripheral Examples ([SPRC832](#))
 - 2803x C/C++ Header Files and Peripheral Examples ([SPRC892](#))
- **Delfino (Floating-Point) Series**
 - C2833x/C2823x C/C++ Header Files and Peripheral Examples ([SPRC530](#))
 - C2834x C/C++ Header Files and Peripheral Examples ([SPRC892](#))
- **Other Fixed-Point C28x Microcontrollers**
 - C2833x/C2823x C/C++ Header Files and Peripheral Examples ([SPRC530](#))
 - C281x C/C++ Header Files and Peripheral Examples ([SPRC097](#))
 - C280x, C2801x C/C++ Header Files and Peripheral Examples ([SPRC191](#))
 - C2804x C/C++ Header Files and Peripheral Examples ([SPRC324](#))

Depending on your current needs, the software included in these downloads are learning tools or the basis for a development platform.

- **Learning Tool:**

The C/C++ Header Files and Peripheral Examples include several example Code Composer Studio™ projects. These examples explain the steps required to initialize the device and utilize on-chip peripherals. The examples can be copied and modified to quickly experiment with peripheral configurations.

- **Development Platform:**

The header files can be incorporated into a project as a hardware abstraction layer for accessing on-chip peripherals using C or C++ code. You can also pick and choose functions as needed and discard the rest.

This application report does not provide a tutorial on C, C++, C28xx assembly, or emulation tools. You should have a basic understanding of C code and the ability to load and run code using Code Composer Studio. While knowledge of C28xx assembly is not required to understand the hardware abstraction layer, it is useful to understand the code optimization and read-modify-write sections. If you have assembly instruction-related questions, see the *TMS320C28x CPU and Instruction Set Reference Guide* ([SPRU430](#)).

Examples are based on the following software versions:

- C281x C/C++ Header Files and Peripheral Examples ([SPRC097](#)) V1.00
- C280x, C2801x C/C++ Header Files and Peripheral Examples ([SPRC191](#)) V1.41
- C2804x C/C++ Header Files and Peripheral Examples ([SPRC324](#)) V1.00
- C28x Compiler V4.1.1

The following abbreviations are used:

- C/C++ Header Files and Peripheral Examples refers to any of the header file packages: C281x C/C++ Header Files and Peripheral Examples ([SPRC097](#)), C280x C2801x C/C++ Header Files and Peripheral Examples (SPRC191) or C2804x C/C++ Header Files and Peripheral Examples ([SPRC324](#))
- TMS320x280x and 280x refer to all devices in the TMS320x280x and TMS320x2801x family and the UCD9501. For example: TMS320F2801, TMS320F2806, TMS320F2808, TMS320F28015 and TMS320F28016.
- TMS320x2804x and 2804x refers all devices in the TMS320x2804x family. For example, the TMS320F28044.
- TMS320x281x and 281x refer to all devices in the TMS320x281x family. For example: TMS320F2810, TMS320F2811, and TMS320F2812, TMS320C2810, and so forth.
- C28x refers to the TMS320C28x CPU; this CPU is used on all of the above DSPs.

2 Traditional #define Approach

Developers have traditionally used #define macros to access registers in C or C++. To illustrate this approach, consider the SCI-A and SCI-B register files shown in [Table 1](#).

Table 1. SCI-A, SCI-B Configuration and Control Registers

| SCI-A Register Name ⁽¹⁾ | Address | Description |
|------------------------------------|---------|--|
| SCIC CRA | 0x7050 | SCI-A Communications Control Register |
| SCI CTL1A | 0x7051 | SCI-A Control Register 1 |
| SCI HBAUDA | 0x7052 | SCI-A Baud Register, High Bits |
| SCI LBAUDA | 0x7053 | SCI-A Baud Register, Low Bits |
| SCI CTL2A | 0x7054 | SCI-A Control Register 2 |
| SCI RXSTA | 0x7055 | SCI-A Receive Status Register |
| SCI RXEMUA | 0x7056 | SCI-A Receive Emulation Data Buffer Register |
| SCI RXBUFA | 0x7057 | SCI-A Receive Data Buffer Register |
| SCI TXBUFA | 0x7059 | SCI-A Transmit Data Buffer Register |
| SCI FFTXA | 0x705A | SCI-A FIFO Transmit Register |
| SCI FFRXA | 0x705B | SCI-A FIFO Receive Register |
| SCI FFCTA | 0x705C | SCI-A FIFO Control Register |
| SCI PRIA | 0x705F | SCI-A Priority Control Register |
| SCI-B Register Name ⁽²⁾ | Address | Description |
| SCIC CRB | 0x7750 | SCI-B Communications Control Register |
| SCI CTL1B | 0x7751 | SCI-B Control Register 1 |
| SCI HBAUDB | 0x7752 | SCI-B Baud Register, High Bits |
| SCI LBAUDB | 0x7753 | SCI-B Baud Register, Low Bits |
| SCI CTL2B | 0x7754 | SCI-B Control Register 2 |
| SCI RXSTB | 0x7755 | SCI-B Receive Status Register |
| SCI RXEMUB | 0x7756 | SCI-B Receive Emulation Data Buffer Register |
| SCI RXBUFB | 0x7757 | SCI-B Receive Data Buffer Register |
| SCI TXBUFB | 0x7759 | SCI-B Transmit Data Buffer Register |
| SCI FFTXB | 0x775A | SCI-B FIFO Transmit Register |
| SCI FFRXB | 0x775B | SCI-B FIFO Receive Register |
| SCI FFCTB | 0x775C | SCI-B FIFO Control Register |
| SCI PRIB | 0x775F | SCI-B Priority Control Register |

⁽¹⁾ These registers are described in the *TMS320x281x Serial Communications Interface (SCI) Reference Guide* ([SPRU051](#)).

⁽²⁾ These registers are reserved on devices without the SCI-B peripheral. See the data manual for details.

A developer can implement #define macros for the SCI peripherals by adding definitions like those in Example 1 to an application header file. These macros provide an address label, or a pointer, to each register location. Even if a peripheral is an identical copy a macro is defined for every register. For example, every register in SCI-A and SCI-B is specified separately.

Example 1. Traditional #define Macros

```

/*****
* Traditional header file
*****/

#define Uint16 unsigned int
#define Uint32 unsigned long

// Memory Map
// Addr Register
#define SCICCRRA (volatile Uint16 *)0x7050 // 0x7050 SCI-A Communications Control
#define SCICTL1A (volatile Uint16 *)0x7051 // 0x7051 SCI-A Control Register 1
#define SCIHBAUDA (volatile Uint16 *)0x7052 // 0x7052 SCI-A Baud Register, High Bits
#define SCILBAUDA (volatile Uint16 *)0x7053 // 0x7053 SCI-A Baud Register, Low Bits
#define SCICTL2A (volatile Uint16 *)0x7054 // 0x7054 SCI-A Control Register 2
#define SCIRXSTA (volatile Uint16 *)0x7055 // 0x7055 SCI-A Receive Status
#define SCIRXEMUA (volatile Uint16 *)0x7056 // 0x7056 SCI-A Receive Emulation Data Buffer
#define SCIRXBUFA (volatile Uint16 *)0x7057 // 0x7057 SCI-A Receive Data Buffer
#define SCITXBUFA (volatile Uint16 *)0x7059 // 0x7059 SCI-A Transmit Data Buffer
#define SCIFFTXA (volatile Uint16 *)0x705A // 0x705A SCI-A FIFO Transmit
#define SCIFFRXA (volatile Uint16 *)0x705B // 0x705B SCI-A FIFO Receive
#define SCIFFCTA (volatile Uint16 *)0x705C // 0x705C SCI-A FIFO Control
#define SCIPRIA (volatile Uint16 *)0x705F // 0x705F SCI-A Priority Control
#define SCICCRB (volatile Uint16 *)0x7750 // 0x7750 SCI-B Communications Control
#define SCICTL1B (volatile Uint16 *)0x7751 // 0x7751 SCI-B Control Register 1
#define SCIHBAUDB (volatile Uint16 *)0x7752 // 0x7752 SCI-B Baud Register, High Bits
#define SCILBAUDB (volatile Uint16 *)0x7753 // 0x7753 SCI-B Baud Register, Low Bits
#define SCICTL2B (volatile Uint16 *)0x7754 // 0x7754 SCI-B Control Register 2
#define SCIRXSTB (volatile Uint16 *)0x7755 // 0x7755 SCI-B Receive Status
#define SCIRXEMUB (volatile Uint16 *)0x7756 // 0x7756 SCI-B Receive Emulation Data Buffer
#define SCIRXBUFB (volatile Uint16 *)0x7757 // 0x7757 SCI-B Receive Data Buffer
#define SCITXBUFB (volatile Uint16 *)0x7759 // 0x7759 SCI-B Transmit Data Buffer
#define SCIFFTXB (volatile Uint16 *)0x775A // 0x775A SCI-B FIFO Transmit
#define SCIFFRXB (volatile Uint16 *)0x775B // 0x775B SCI-B FIFO Receive
#define SCIFFCTB (volatile Uint16 *)0x775C // 0x775C SCI-B FIFO Control
#define SCIPRIB (volatile Uint16 *)0x775F // 0x775F SCI-B Priority Control

```

Each macro definition can then be used as a pointer to the register's location as shown in Example 2.

Example 2. Accessing Registers Using #define Macros

```

/*****
* Source file using #define macros
*****/

...
*SCICTL1A = 0x0003; //write entire register
*SCICTL1B |= 0x0001; //enable RX
...

```

Some advantages of traditional #define macros are:

- Macros are simple, fast, and easy to type.
- Variable names exactly match register names; variable names are easy to remember.

Disadvantages to traditional #define macros include the following:

- Bit fields are not easily accessible; you must generate masks to manipulate individual bits.
- You cannot easily display bit fields within the Code Composer Studio watch window.
- Macros do not take advantage of Code Composer Studio's auto-completion feature.
- Macros do not benefit from duplicate peripheral reuse.

3 Bit Field and Register-File Structure Approach

Instead of accessing registers using #define macros, it is more flexible and efficient to use a bit field and register-file structure approach.

- **Register-File Structures:**

A register file is the collection of registers belonging to a peripheral. These registers are grouped together in C/C++ as members of a structure; this is called a register-file structure. Each register-file structure is mapped in memory directly over the peripheral registers at compile time. This mapping allows the compiler to efficiently access the registers using the CPU's data page pointer (DP).

- **Bit Field Definitions:**

Bit fields can be used to assign a name and width to each functional field within a register. Registers defined in terms of bit fields allow the compiler to manipulate single elements within a register. For example, a flag can be read by referencing the bit field name corresponding to that flag.

The remainder of this section describes a register-file structure with bit-field implementation for the SCI peripherals. This process consists of the following steps:

1. Create a simple SCI register-file structure variable type; this implementation does not include bit fields.
2. Create a variable of this new type for each of the SCI instances.
3. Map the register-file structure variables to the first address of the registers using the linker.
4. Add bit-field definitions for select SCI registers.
5. Add union definitions to provide access to either bit fields or the entire register.
6. Rewrite the register-file structure type to include the bit-field and union definitions.

In the C/C++ Header Files and Peripheral Examples, the register-file structures and bit fields have been implemented for all peripherals on the TMS320x28xx and TMS320x28xxx devices.

3.1 Defining A Register-File Structure

Example 1 showed a hardware abstraction implementation using #define macros. In this section, the implementation is changed to a simple register file structure. [Table 2](#) lists the registers that belong to the SCI peripheral. This register file is identical for each instance of the SCI, i.e., SCI-A and SCI-B.

Table 2. SCI-A and SCI-B Common Register File

| Name | Size | Address Offset | Description |
|----------|---------|----------------|--|
| SCICCR | 16 bits | 0 | SCI Communications Control Register |
| SCICTL1 | 16 bits | 1 | SCI Control Register 1 |
| SCIHBAUD | 16 bits | 2 | SCI Baud Register, High Bits |
| SCILBAUD | 16 bits | 3 | SCI Baud Register, Low Bits |
| SCICTL2 | 16 bits | 4 | SCI Control Register 2 |
| SCIRXST | 16 bits | 5 | SCI Receive Status Register |
| SCIRXEMU | 16 bits | 6 | SCI Receive Emulation Data Buffer Register |
| SCIRXBUF | 16 bits | 7 | SCI Receive Data Buffer Register |
| SCITXBUF | 16 bits | 9 | SCI Transmit Data Buffer Register |
| SCIFFTX | 16 bits | 10 | SCI FIFO Transmit Register |
| SCIFFRX | 16 bits | 11 | SCI FIFO Receive Register |
| SCIFFCT | 16 bits | 12 | SCI FIFO Control Register |
| SCIPRI | 16 bits | 15 | SCI Priority Control Register |

The code in Example 3 groups the SCI registers together as members of a C/C++ structure. The register in the lowest memory location is listed first in the structure and the register in the highest memory location is listed last. Reserved memory locations are held with variables that are not used except as space holders, i.e., rsvd1, rsvd2, rsvd3, and so forth. The register's size is indicated by its type: Uint16 for 16-bit (unsigned int) and Uint32 for 32-bit (unsigned long). The SCI peripheral registers are all 16-bits so only Uint16 has been used.

Example 3. SCI Register-File Structure Definition

```

/*****
 * SCI header file
 * Defines a register file structure for the SCI peripheral
 *****/

#define Uint16 unsigned int
#define Uint32 unsigned long

struct SCI_REGS {
    Uint16 SCICCR_REG    SCICCR;    // Communications control register
    Uint16 SCICTL1_REG   SCICTL1;   // Control register 1
    Uint16             SCIHBAUD;    // Baud rate (high) register
    Uint16             SCILBAUD;    // Baud rate (low) register
    Uint16 SCICTL2_REG   SCICTL2;   // Control register 2
    Uint16 SCIRXST_REG   SCIRXST;   // Receive status register
    Uint16             SCIRXEMU;    // Receive emulation buffer register
    Uint16 SCIRXBUF_REG  SCIRXBUF;   // Receive data buffer
    Uint16             rsvd1;       // reserved
    Uint16             SCITXBUF;    // Transmit data buffer
    Uint16 SCIFFTX_REG   SCIFFTX;   // FIFO transmit register
    Uint16 SCIFFRX_REG   SCIFFRX;   // FIFO receive register
    Uint16 SCIFFCT_REG   SCIFFCT;   // FIFO control register
    Uint16             rsvd2;       // reserved
    Uint16             rsvd3;       // reserved
    Uint16 SCIPRI_REG    SCIPRI;    // FIFO Priority control
};
    
```

The structure definition in Example 3 creates a new type called *struct SCI_REGS*. The definition alone does not create any variables. Example 4 shows how variables of type *struct SCI_REGS* are created in a way similar to built-in types such as *int* or *unsigned int*. Multiple instances of the same peripheral use the same type definition. If there are two SCI peripherals on a device, then two variables are created: *SciaRegs* and *ScibRegs*.

Example 4. SCI Register-File Structure Variables

```

/*****
 * Source file using register-file structures
 * Create a variable for each of the SCI register files
 *****/

volatile struct SCI_REGS SciaRegs;
volatile struct SCI_REGS ScibRegs;
    
```

The *volatile* keyword is very important in Example 4. A variable is declared as *volatile* whenever its value can be changed by something outside the control of the code in which it appears. For example, peripheral registers can be changed by the hardware itself or within an interrupt. If *volatile* is not specified, then it is assumed the variable can only be modified by the code in which it appears and the compiler may optimize out what is seen as an unnecessary access. The compiler will not, however, optimize out any *volatile* variable access; this is true even if the compiler's optimizer is enabled.

3.2 Using the `DATA_SECTION` Pragma to Map a Register-File Structure to Memory

The compiler produces relocatable blocks of code and data. These blocks, called sections, are allocated in memory in a variety of ways to conform to different system configurations. The section to memory block assignments are defined in the linker command file.

By default, the compiler assigns global and static variables like *SciaRegs* and *ScibRegs* to the *.ebss* or *.bss* section. In the case of the abstraction layer, however, the register-file variables are instead allocated to the same memory as the peripheral's register file. Each variable is assigned to a specific data section outside of *.bss/ebss* by using the compiler's `DATA_SECTION` pragma.

The syntax for the DATA_SECTION pragma in C is:

```
#pragma DATA_SECTION (symbol,"section name")
```

The syntax for the DATA_SECTION pragma in C++ is:

```
#pragma DATA_SECTION ("section name")
```

The DATA_SECTION pragma allocates space for the *symbol* in the section called *section name*. In Example 5, the DATA_SECTION pragma is used to assign the variable *SciaRegs* and *ScibRegs* to data sections named *SciaRegsFile* and *ScibRegsFile*. The data sections are then directly mapped to the same memory block occupied by the respective SCI registers.

Example 5. Assigning Variables to Data Sections

```

/*****
 * Assign variables to data sections using the #pragma compiler statement
 * C and C++ use different forms of the #pragma statement
 * When compiling a C++ program, the compiler will define __cplusplus automatically
 *****/
//-----
#ifdef __cplusplus
#pragma DATA_SECTION("SciaRegsFile")
#else
#pragma DATA_SECTION(SciaRegs,"SciaRegsFile");
#endif
volatile struct SCI_REGS SciaRegs;

//-----
#ifdef __cplusplus
#pragma DATA_SECTION("ScibRegsFile")
#else
#pragma DATA_SECTION(ScibRegs,"ScibRegsFile");
#endif
volatile struct SCI_REGS ScibRegs;

```

This data section assignment is repeated for each peripheral. The linker command file is then modified to map each data section directly to the memory space where the registers are mapped. For example, [Table 1](#) indicates that the SCI-A registers are memory mapped starting at address 0x7050. Using the assigned data section, the variable *SciaRegs* is allocated to a memory block starting at address 0x7050. The memory allocation is defined in the linker command file (.cmd) as shown in Example 6. For more information on using the C28x linker and linker command files, see the *TMS320C28x Assembly Language Tools User's Guide* ([SPRU513](#)).

Example 6. Mapping Data Sections to Register Memory Locations

```

/*****
 * Memory linker .cmd file
 * Assign the SCI register-file structures to the corresponding memory
 *****/

MEMORY
{
  ...
  PAGE 1:
  SCIA      : origin = 0x007050, length = 0x000010    /* SCI-A registers */
  SCIB      : origin = 0x007750, length = 0x000010    /* SCI-B registers */
  ...
}

SECTIONS
{
  ...
  SciaRegsFile      : > SCIA,          PAGE = 1
  ScibRegsFile      : > SCIB,          PAGE = 1
  ...
}

```

By mapping the register-file structure variable directly to the memory address of the peripheral's registers, you can access the registers directly in C/C++ code by simply modifying the required member of the structure. Each member of a structure can be used just like a normal variable, but its name will be a bit longer. For example, to write to the SCI-A Control Register (SCICCR), access the SCICCR member of *SciaRegs* as shown in Example 7. Here the dot is an operator in C that selects a member from a structure.

Example 7. Accessing a Member of the SCI Register-File Structure

```

/*****
* User's source file
*****/
...
SciaRegs.SCICCR = SCICCR_A_MASK;
ScibRegs.SCICCR = SCICCR_B_MASK;
...

```

3.3 Adding Bit-Field Definitions


Accessing specific bits within the register is often useful; bit-field definitions provide this flexibility. Bit fields are defined within a C/C++ structure by providing a list of bit-field names. each followed by colon and the number of bits the field occupies.

Bit fields are a convenient way to express many difficult operations in C or C++. Bit fields do, however, suffer from a lack of portability between hardware platforms. On the C28x devices, the following rules apply to bit fields:

- Bit field members are stored from right to left in memory. That is, the least significant bit, or bit zero, of the register corresponds to the first bit field.
- The C28x compiler limits the maximum number of bits within a bit field to the size of an integer; no bit field can be greater than 16 bits in length.
- If the total number of bits defined by bit fields within a structure grows above 16 bits, then the next bit field is stored consecutively in the next word of memory.


The SCICCR and SCICTL1 registers in [Figure 1](#) and [Figure 2](#) translate into the C/C++ bit-field definitions in Example 8. Reserved locations within the register are held with bit fields that are not used except as place holders, i.e., rsvd1, rsvd2, et cetera. As with other structures, each member is accessed using the dot operator in C or C++.

Figure 1. SCI SCICCR Register

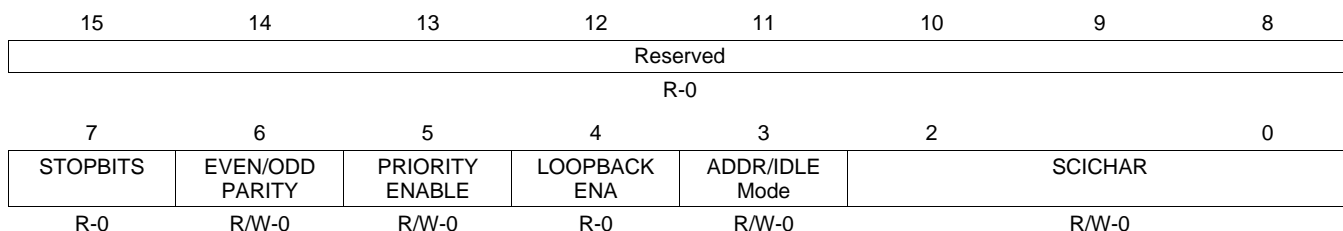

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Figure 2. SCI SCICTL1 Register

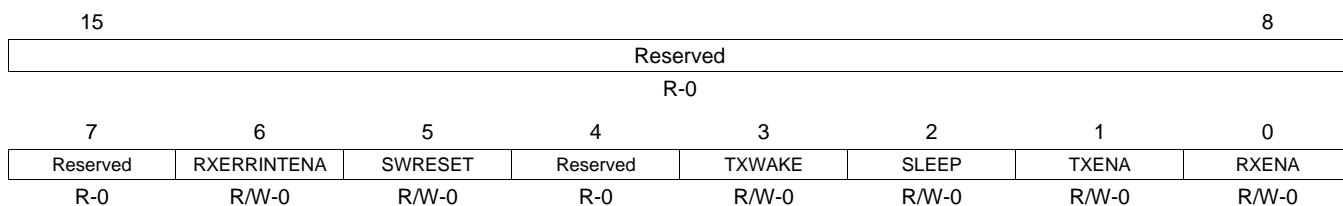

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Example 8. SCI Control Registers Defined Using Bit Fields

```

/*****
* SCI header file
*****/
//-----
// SCICCR communication control register bit definitions:
//
struct SCICCR_BITS {          // bit   description
    Uint16 SCICCHAR:3;        // 2:0   Character length control
    Uint16 ADDRIDLE_MODE:1;    // 3     ADDR/IDLE Mode control
    Uint16 LOOPBKENA:1;        // 4     Loop Back enable
    Uint16 PARITYENA:1;        // 5     Parity enable
    Uint16 PARITY:1;           // 6     Even or Odd Parity
    Uint16 STOPBITS:1;         // 7     Number of Stop Bits
    Uint16 rsvd1:8;            // 15:8  reserved
};
//-----
// SCICTL1 control register 1 bit definitions:
//
struct SCICTL1_BITS {         // bit   description
    Uint16 RXENA:1;           // 0     SCI receiver enable
    Uint16 TXENA:1;           // 1     SCI transmitter enable
    Uint16 SLEEP:1;           // 2     SCI sleep
    Uint16 TXWAKE:1;          // 3     Transmitter wakeup method
    Uint16 rsvd:1;            // 4     reserved
    Uint16 SWRESET:1;         // 5     Software reset
    Uint16 RXERRINTENA:1;     // 6     Receive interrupt enable
    Uint16 rsvd1:9;           // 15:7  reserved
};

```

3.4 Using Unions

While bit fields provide access to individual bits, you may still want to access the register as a single value. To provide this option, a union declaration is created to allow the register to be accessed in terms of the defined bit fields or as a whole. The union definitions for the SCI communications control register and control register 1 are shown in Example 9.

Example 9. Union Definition to Provide Access to Bit Fields and the Whole Register

```

/*****
* SCI header file
*****/

union SCICCR_REG {
    Uint16          all;
    struct SCICCR_BITS bit;
};

union SCICTL1_REG {
    Uint16          all;
    struct SCICTL1_BITS bit;
};

```

Once bit-field and union definitions are established for specific registers, the SCI register-file structure is rewritten in terms of the union definitions as shown in Example 10. Note that not all registers have bit field definitions; some registers, such as SCITXBUF, will always be accessed as a whole and a bit field definition is not necessary.

Example 10. SCI Register-File Structure Using Unions

```

/*****
* SCI header file
*****/

//-----
// SCI Register File:
//
struct SCI_REGS {
    union SCICCR_REG    SCICCR;    // Communications control register
    union SCICTL1_REG   SCICTL1;   // Control register 1
    Uint16              SCIHBAUD;  // Baud rate (high) register
    Uint16              SCILBAUD;  // Baud rate (low) register
    union SCICTL2_REG   SCICTL2;   // Control register 2
    union SCIRXST_REG   SCIRXST;   // Receive status register
    Uint16              SCIRXEMU;  // Receive emulation buffer register
    union SCIRXBUF_REG  SCIRXBUF;  // Receive data buffer
    Uint16              rsvd1;     // reserved
    Uint16              SCITXBUF;  // Transmit data buffer
    union SCIFFTX_REG   SCIFFTX;   // FIFO transmit register
    union SCIFFRX_REG   SCIFFRX;   // FIFO receive register
    union SCIFFCT_REG   SCIFFCT;   // FIFO control register
    Uint16              rsvd2;     // reserved
    Uint16              rsvd3;     // reserved
    union SCIPRI_REG    SCIPRI;    // FIFO Priority control
};

```

As with other structures, each member (.all or .bit) is accessed using the dot operator in C/C++ as shown in Example 11. When the .all member is specified, the entire register is accessed. When the .bit member is specified, then the defined bit fields can be directly accessed.

NOTE: Writing to a bit field has the appearance of writing to only the specified field. In reality, however, the CPU performs what is called a read-modify-write operation; the entire register is read, its contents are modified and the entire value is written back. Possible side effects of read-modify-write instructions are discussed in [Section 6](#).

Example 11. Accessing Bit Fields in C/C++

```

/*****
* User's source file
*****/

// Access registers without a bit field definition (.all, .bit not used)
SciaRegs.SCIHBAUD = 0;
SciaRegs.SCILBAUD = 1;

// Write to bit fields in SCI-A SCICTL1
SciaRegs.SCICTL1.bit.SWRESET = 0;
SciaRegs.SCICTL1.bit.SWRESET = 1;
SciaRegs.SCIFFCT.bit.ABDCLR = 1;
SciaRegs.SCIFFCT.bit.CDC = 1;

// Poll (i.e., read) a bit
while(SciaRegs.SCIFFCT.bit.CDC == 1) { }

// Write to the whole SCI-B SCICTL1/2 registers (use .all)
ScibRegs.SCICTL1.all = 0x0003;
ScibRegs.SCICTL2.all = 0x0000;

```

4 Bit Field and Register-File Structure Advantages

The bit field and register-file structure approach has many advantages that include:

- Register-file structures and bit fields are already available from Texas Instruments.**
 In the C/C++ Header Files and Peripheral Examples, the register-file structures and bit fields have been implemented for all peripherals on the TMS320x28xx and TMS320x28xxx devices. The included header files can be used as-is or extended to suit your particular needs.
 The complete implementation is available in the software downloads from TI's website as shown in [Section 1](#).
- Using bit fields produces code that is easy-to-write, easy-to-read, easy-to-update, and efficient.**
 Bit fields can be manipulated quickly without the need to determine a register mask value. In addition, you have the flexibility to access registers either by bit field or as a single quantity as shown in Example 11. Code written using the register file structures also generates very efficient code. Code efficiency will be discussed in [Section 5](#).
- Bit fields take advantage of the Code Composer Studio editors auto complete feature.**
 At first it may seem that variable names are harder to remember and longer to type when using register-file structures and bit fields. The Code Composer Studio editor provides a list of possible structure/bit field elements as you type; this makes it easier to write code without referring to documentation for register and bit field names. An example of the auto completion feature for the CPU-Timer TCR register is shown in [Figure 3](#).


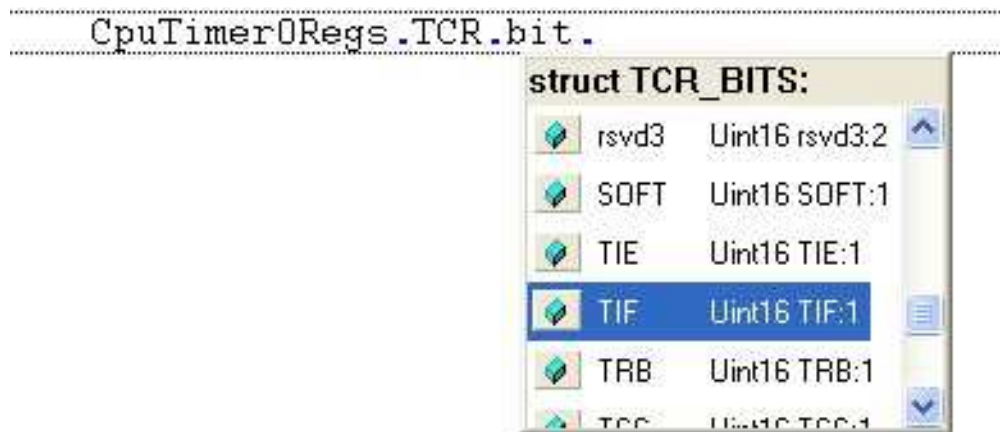


Figure 3. Code Composer Studio 3.3 Autocomplete Feature

- **Increases the effectiveness of the Code Composer Studio Watch Window.**

You can add and expand register-file structures in Code Composer Studio's watch window as shown in Figure 4. Bit field values are read directly without extracting their value by hand.

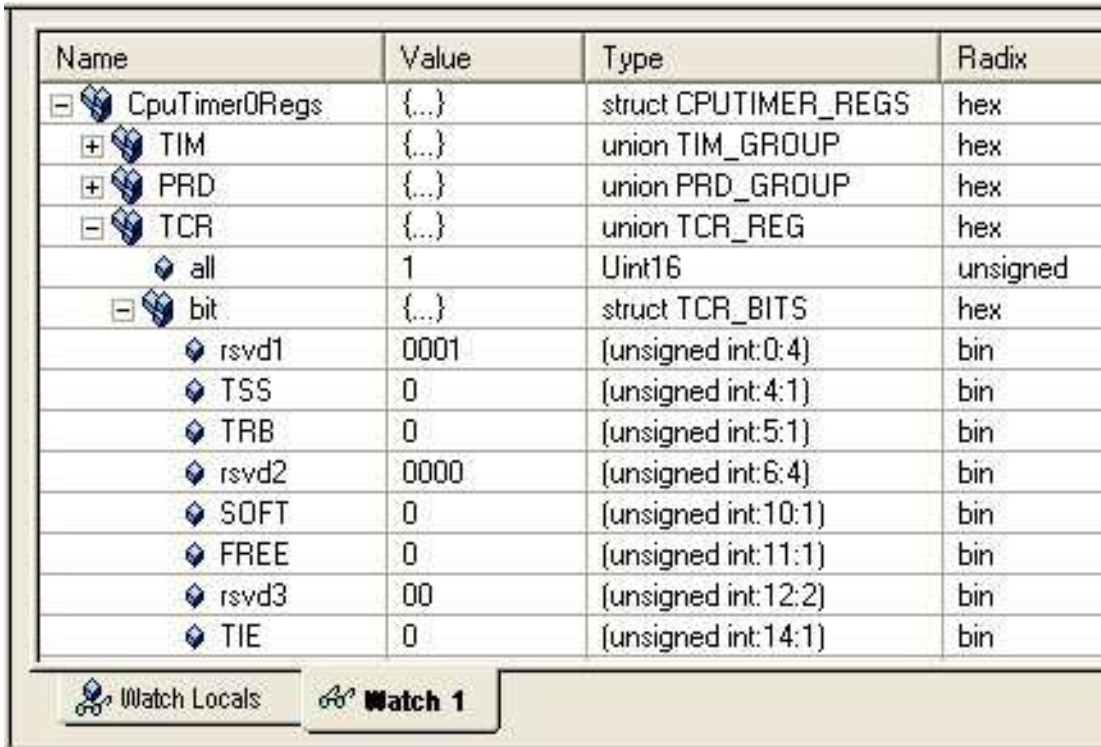

| Name | Value | Type | Radix |
|-------------------|-------|----------------------|----------|
| [-] CpuTimer0Regs | {...} | struct CPUTIMER_REGS | hex |
| [+] TIM | {...} | union TIM_GROUP | hex |
| [+] PRD | {...} | union PRD_GROUP | hex |
| [-] TCR | {...} | union TCR_REG | hex |
| all | 1 | Uint16 | unsigned |
| [-] bit | {...} | struct TCR_BITS | hex |
| rsvd1 | 0001 | (unsigned int:0:4) | bin |
| TSS | 0 | (unsigned int:4:1) | bin |
| TRB | 0 | (unsigned int:5:1) | bin |
| rsvd2 | 0000 | (unsigned int:6:4) | bin |
| SOFT | 0 | (unsigned int:10:1) | bin |
| FREE | 0 | (unsigned int:11:1) | bin |
| rsvd3 | 00 | (unsigned int:12:2) | bin |
| TIE | 0 | (unsigned int:14:1) | bin |

Figure 4. Code Composer Studio Watch Window

5 Code Size and Performance Using Bit Fields

The bit field and register-file structure approach is very efficient when accessing a single bit within a register or when polling a bit. As an example, consider code to initialize the PCLKCR0 register on a TMS320x280x device. PCLKCR0 is described in detail in the *TMS320x280x, 2801x, 2804x System Control and Interrupts Reference Guide* ([SPRU712](#)). The bit-field definition for this register is shown in Example 12.

Figure 5. Peripheral Clock Control 0 Register (PCLKCR0)

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|------------|------------|----------|-----------|-----------|-----------|-----------|-----------|
| ECANBENCLK | ECANAENCLK | Reserved | | SCIBENCLK | SCIAENCLK | SPIBENCLK | SPIAENCLK |
| R/W-0 | R/W-0 | R-0 | | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| SPIDENCLK | SPICENCLK | Reserved | I2CAENCLK | ADCENCLK | TBCLKSYNC | Reserved | |
| R/W-0 | R/W-0 | R-0 | R/W-0 | R/W-0 | R/W-0 | R-0 | |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Example 12. TMS320x280x PCLKCR0 Bit-Field Definition

```
// Peripheral clock control register 0 bit definitions:
struct PCLKCR0_BITS { // bits description
    Uint16 rsvd1:2; // 1:0 reserved
    Uint16 TBCLKSYNC:1; // 2 eWPM Module TBCLK enable/sync
    Uint16 ADCENCLK:1; // 3 Enable high speed clk to ADC
    Uint16 I2CAENCLK:1; // 4 Enable SYSCLKOUT to I2C-A
    Uint16 rsvd2:1; // 5 reserved
    Uint16 SPICENCLK:1; // 6 Enable low speed clk to SPI-C
    Uint16 SPIDENCLK:1; // 7 Enable low speed clk to SPI-D
    Uint16 SPIAENCLK:1; // 8 Enable low speed clk to SPI-A
    Uint16 SPIBENCLK:1; // 9 Enable low speed clk to SPI-B
    Uint16 SCIAENCLK:1; // 10 Enable low speed clk to SCI-A
    Uint16 SCIBENCLK:1; // 11 Enable low speed clk to SCI-B
    Uint16 rsvd3:2; // 13:12 reserved
    Uint16 ECANAENCLK:1; // 14 Enable SYSCLKOUT to eCAN-A
    Uint16 ECANBENCLK:1; // 15 Enable SYSCLKOUT to eCAN-B
};
```

The code in Example 13 enables the peripheral clocks on a TMS320x2801 device. The C28x compiler generates one assembly code instruction for each C-code register access. This is very efficient; there is a one-to-one correlation between the C instructions and the assembly instructions. The only overhead is the initial instruction to set the data page pointer (DP).

Example 13. Assembly Code Generated by Bit Field Accesses

| C-Source Code | Generated Memory | Assembly Instruction |
|---|------------------|----------------------|
| // Enable only 2801 Peripheral Clocks | | |
| EALLOW; | 3F82A7 | EALLOW |
| SysCtrlRegs.PCLKCR0.bit.rsvd1 = 0; | 3F82A8 | MOVW DP, #0x01C0 |
| SysCtrlRegs.PCLKCR0.bit.TBCLKSYNC = 0; | 3F82AA | AND @28, #0xFFFC |
| SysCtrlRegs.PCLKCR0.bit.ADCENCLK = 1; | 3F82AC | AND @28, #0xFFFB |
| SysCtrlRegs.PCLKCR0.bit.I2CAENCLK = 1; | 3F82AE | OR @28, #0x0008 |
| SysCtrlRegs.PCLKCR0.bit.rsvd2 = 0; | 3F82B0 | OR @28, #0x0010 |
| SysCtrlRegs.PCLKCR0.bit.SPICENCLK = 1; | 3F82B2 | AND @28, #0xFFDF |
| SysCtrlRegs.PCLKCR0.bit.SPIDENCLK = 1; | 3F82B4 | OR @28, #0x0040 |
| SysCtrlRegs.PCLKCR0.bit.SPIAENCLK = 1; | 3F82B6 | OR @28, #0x0080 |
| SysCtrlRegs.PCLKCR0.bit.SPIBENCLK = 1; | 3F82B8 | OR @28, #0x0100 |
| SysCtrlRegs.PCLKCR0.bit.SCIAENCLK = 1; | 3F82BA | OR @28, #0x0200 |
| SysCtrlRegs.PCLKCR0.bit.SCIBENCLK = 0; | 3F82BC | OR @28, #0x0400 |
| SysCtrlRegs.PCLKCR0.bit.rsvd3 = 0; | 3F82BE | AND @28, #0xF7FF |
| SysCtrlRegs.PCLKCR0.bit.ECANAENCLK = 1; | 3F82C0 | AND @28, #0xCFFF |
| SysCtrlRegs.PCLKCR0.bit.ECANBENCLK = 0; | 3F82C2 | OR @28, #0x4000 |
| EDIS; | 3F82C4 | AND @28, #0x7FFF |
| | 3F82C6 | EDIS |

NOTE: EALLOW and EDIS are macros defined in the C/C++ Header Files and Peripheral Examples. These macros expand to the EALLOW and EDIS assembly instructions.

The EALLOW protection mechanism prevents spurious CPU writes to several registers. Executing EALLOW permits the CPU to write freely to protected registers and executing EDIS protects them once more. For information on EALLOW protection and a list of protected registers, refer to the System Control and Interrupts reference guide specific to your device.

To calculate how many cycles the code in Example 13 will take, you need to know how many wait states are required to access the PCLKCR0 register. Wait state information for all memory blocks and peripheral frames is listed in the device specific data manual. The PCLKCR0 register is in peripheral frame 2; this frame requires two wait states for a read access and no wait states for a write access. This means a read from PCLKCR0 takes three cycles total and a write takes one cycle. In addition, a new access to PCLKCR0 cannot begin until the previous write is complete. This built-in protection mechanism removes pipeline effects and makes sure operations proceed in the correct order; all of the peripheral registers have this protection. In Example 13, each access to the PCLKCR0 register will take six cycles; the pipeline phases are shown in Table 3.

Table 3. CPU-Pipeline Activity For Read-Modify-Write Instructions in Example 13

| Read 1 - Read Begins | CPU-Pipeline Phase ⁽¹⁾ | | | | Cycle |
|----------------------|-----------------------------------|--------------------------|-----------------------|--|-------|
| | Read 2 - Data Latched | Execute - Value Modified | Write - Value written | | |
| AND @28, #0xFFFFC | | | | | 1 |
| AND @28, #0xFFFFC | | | | | 2 |
| AND @28, #0xFFFFC | | | | | 3 |
| | AND @28, #0xFFFFC | | | | 4 |
| | | AND @28, #0xFFFFC | | | 5 |
| | | | AND @28, #0xFFFFC | | 6 |
| AND @28, #0xFFFFB | | | | | 7 |
| AND @28, #0xFFFFB | | | | | 8 |
| AND @28, #0xFFFFB | | | | | 9 |
| | AND @28, #0xFFFFB | | | | 10 |
| | | AND @28, #0xFFFFB | | | 11 |
| | | | AND @28, #0xFFFFB | | 12 |
| OR @28, #0x0008 | | | | | 13 |
| OR @28, #0x0008 | | | | | 14 |
| OR @28, #0x0008 | | | | | 15 |
| | OR @28, #0x0008 | | | | 16 |
| | | OR @28, #0x0008 | | | 17 |
| | | | OR @28, #0x0008 | | 18 |
| OR @28, #0x0010 | | | | | |
| etc... | | | | | |

⁽¹⁾ For detailed CPU pipeline information, see the *TMS320C28x CPU and Instruction Set Reference Guide* ([SPRU430](#)).

When code size and cycle counts must be kept to a minimum, it is beneficial to reduce the number of instructions required to initialize a register to as few as possible. Here are some options for reducing code size:

- **Enable the compiler's optimizer:**

As mentioned in [Section 3.1](#), register-file variables are declared as volatile. For this reason, enabling the optimizer alone will **not** reduce the number of instructions. The keyword volatile alerts the compiler that the variable's value can change outside of the currently executing code. While removing the volatile keyword would reduce code size, it is not recommended. Removing volatile must be done with great care and only where the developer is certain doing so will not yield incorrect results.

- **Write to the complete register (.all union member):**

The union definitions discussed in [Section 3.4](#) allow access to either specific bit fields or to the entire register. When a write is performed to the entire register using the .all member of the union, code size is reduced. This method creates very efficient code as shown in Example 14. Using .all, however, makes the code both harder to write and harder to read. It is not immediately evident how different bit fields in the register are configured.

Example 14. Optimization Using the .all Union Member

| C-Source Code | Generated Memory | Assembly Instruction |
|-----------------------------------|------------------|----------------------|
| EALLOW; | 3F82A7 | EALLOW |
| SysCtrlRegs.PCLKCR0.all = 0x47D8; | 3F82A8 | MOVW DP,#0x01C0 |
| EDIS; | 3F82AA | MOV @28,#0x47D8 |
| | 3F82AC | EDIS |

- **Use a shadow register and enable the compiler's optimizer:**

This method is the best compromise. The register's contents are loaded into a shadow register of the same type as shown in Example 15. The content of the shadow register is then modified using bit fields. Since *shadowPCLKCR0* is not volatile, the compiler will combine the bit field writes when the optimizer is enabled. Note that all of the reserved locations are also initialized. At the end of the code the value in the shadow register is written to PCLKCR0. This method retains the advantages of bit field definitions and results in code that is easy to read. The assembly shown was generated with the compiler's optimization level -o1 enabled.

Example 15. Optimization Using a Shadow Register

| C-Source Code | Generated Memory | Assembly Instruction |
|---|------------------|----------------------|
| <i>// Enable only 2801 Peripheral Clocks</i> | | |
| union PCLKCR0_REG shadowPCLKCR0; | | |
| EALLOW; | 3F82A7 | EALLOW |
| shadowPCLKCR0.bit.rsvd1 = 0; | 3F82A8 | MOV @AL,#0x47D8 |
| shadowPCLKCR0.bit.TBCLKSYNC = 0; | 3F82AA | MOVW DP,#0x01C0 |
| shadowPCLKCR0.bit.ADCENCLK = 1; <i>// ADC</i> | 3F82AC | MOV @28,AL |
| shadowPCLKCR0.bit.I2CAENCLK = 1; <i>// I2C</i> | 3F82AD | EDIS |
| shadowPCLKCR0.bit.rsvd2 = 0; | | |
| shadowPCLKCR0.bit.SPICENCLK = 1; <i>// SPI-C</i> | | |
| shadowPCLKCR0.bit.SPIDENCLK = 1; <i>// SPI-D</i> | | |
| shadowPCLKCR0.bit.SPIAENCLK = 1; <i>// SPI-A</i> | | |
| shadowPCLKCR0.bit.SPIBENCLK = 1; <i>// SPI-B</i> | | |
| shadowPCLKCR0.bit.SCIAENCLK = 1; <i>// SCI-A</i> | | |
| shadowPCLKCR0.bit.SCIBENCLK = 0; <i>// SCI-B</i> | | |
| shadowPCLKCR0.bit.rsvd3 = 0; | | |
| shadowPCLKCR0.bit.ECANAENCLK= 1; <i>// eCAN-A</i> | | |
| shadowPCLKCR0.bit.ECANBENCLK= 0; <i>// eCAN-B</i> | | |
| SysCtrlRegs.PCLKCR0.all = shadowPCLKCR0.all; | | |
| EDIS; | | |

6 Read-Modify-Write Considerations When Using Bit Fields

When writing to a bit field, the compiler generates what is called a read-modify-write assembly instruction. Read-modify-write refers to the technique used to implement bit-wise or byte-wise operations such as AND, OR and XOR. That is, the location is *read*, the single bit field is *modified*, and the result is *written* back. Example 16 shows some of the C28x read-modify-write assembly instructions .

Example 16. A Few Read-Modify-Write Operations

```

AND  @Var, #0xFFFFC      ; Read 16-bit value "Var"
                          ; AND the value with 0xFFFFC
                          ; Write the 16-bit result to "Var"
                          ;
                          ;
OR   @Var, #0x0010       ; Read 16-bit value "Var"
                          ; OR the value with 0x0010
                          ; Write the 16-bit result to "Var"
                          ;
                          ;
XOR  @VarB, AL            ; Read 16-bit value "Var"
                          ; XOR with AL
                          ; Write the 16-bit result to "Var"
                          ;
                          ;
MOVB *+XAR2[0], AH.LSB   ; Read 16-bit value pointed to by XAR2
                          ; Modify the least significant byte
                          ; Write the 16-bit value back
  
```

With a full CPU pipeline, a C28x based device can complete one read-modify-write operation to zero wait-state SARAM every cycle. When accessing the peripheral registers or external memory, however, required wait states must be taken into account. In addition, the pipeline protection mechanism can further stall instructions in the CPU pipeline. This is described in more detail in [Section 5](#) and in the *TMS320C28x CPU and Instruction Set Reference Guide* ([SPRU430](#)).

Read-modify-write instructions usually have no ill side effects. It is important, however, to realize that read-modify-write instructions do not limit access to only specific bits in the register; these instructions write to all of the register's bits. In some cases, the read-modify-write sequence can cause unexpected results when bits are written to with the value originally read. Registers that are sensitive to read-modify-write instructions fall into three categories:

- Registers with bits that hardware can change after the read, but before the write
- Registers with write 1-to-clear bits
- Registers that have bits that must be written with a value different from what the bits read back

Registers that fall into these three categories are typically found within older peripherals. To keep register compatibility, the register files have not been redesigned to avoid this issue. Newer peripherals, such as the ePWM, eCAP, and eQEP, however, have a register layout specifically designed to avoid these problems.

This section describes in detail the three categories in which read-modify-write operations should be used with care. In addition, an example of each type of register is given along with a suggested method for safely modifying that register. At the end of the section a list of read-modify-write sensitive registers is provided for reference.

6.1 Registers That Hardware Can Modify During Read-Modify-Write Operations

The device itself can change the state of some bits between the read and the write stages of the CPU pipeline. For example, the PIE interrupt flag registers (PIEIFRx where x = 1, 2, ... 12) can change due to an external hardware or peripheral event. The value written back may overwrite a flag, corrupting the value, and result in missed interrupts.

6.1.1 PIEIFRx Registers

If there is a need to clear a PIEIFRx bit, then the rule is to always let the CPU take the interrupt to clear the flag. This is done by re-mapping the interrupt vector to a pseudo interrupt service routine (ISR). The corresponding PIEIERx bit is then set to allow the CPU to service the interrupt using the pseudo ISR. Within the pseudo ISR the interrupt vector is re-mapped to the interrupt vector for the true ISR routine as shown in Example 17.

NOTE: This rule does not apply to the CPU's IFR register. Special instructions are provided to clear CPU IFR bits and will not result in missing interrupts. Use the *OR IFR* instruction to set IFR bits, and use the *AND IFR* instruction to clear pending interrupts.

Example 17. Clearing PIEIFRx (x = 1, 2...12) Registers

```

/*****
* User's source file
*****/

// Pseudo ISR prototype. PTIN = pointer to an interrupt
interrupt void PseudoISR(void);
PINT TempISR;
....
if( PieCtrlRegs.PIEIFR1.bit.INTx4 == 1)
{
// Temp save current vector and remap to pseudo ISR
// Take the interrupt to clear the PIEIFR flag
EALLOW;
TempISR = PieVectTable.XINT1;
PieVectTable.XINT1 = PseudoISR;
PieCtrlRegs.PIEIER1.bit.INTx4 = 1;
EDIS;
}
....

// Pseudo ISR
// Services the interrupt & the hardware clears the PIEIFR flag
// Re-maps the interrupt to the proper ISR
interrupt void PseudoISR(void)
{
EALLOW;
PieVectTable.XINT1 = TempISR;
EDIS;
}

```

6.1.2 GPxDAT Registers

Another case of bits that can change between a read and a write are the GPIO data registers. Consider the code shown in Example 18. Except on 281x devices, the GPxDAT registers reflect the state of the pin, not the output latch. This means the register reflects the actual pin value. However, there is a lag between when the register is written to when the new pin value is reflected back in the register. This may pose a problem when this register is used in subsequent program statements to alter the state of GPIO pins. In Example 18 two program statements attempt to drive two different GPIO pins. The second instruction will wait for the first to finish its write due to the write-followed-by-read protection on this peripheral frame. There will be some lag, however, between the write of GPIO16 and the GPxDAT bit reflecting the new value (1) on the pin. During this lag, the second instruction will read the old value of GPIO16 (0) and write it back along with the new value of GPIO17 (0). Therefore, the GPIO16 pin stays low.

One solution is to put some NOP's between the read-modify-write instructions. A better solution is to use the GPxSET/GPxCLEAR/GPxTOGGLE registers instead of the GPxDAT registers. These registers always read back a 0 and writes of 0 have no effect. Only bits that need to be changed can be specified without disturbing any other bit(s) that are currently in the process of changing. The same code using GPxSET and GPxCLEAR registers is shown in Example 19.

Example 18. Read-Modify-Write Effects on GPxDAT Registers

```

/*****
* User's source file
*****/

for(;;)
{
    // Make LED Green
    GpioDataRegs.GPADAT.bit.GPIO16 = 1; // (1) RED_LED_OFF;
    // Read-modify-write occurs

    GpioDataRegs.GPADAT.bit.GPIO17 = 0; // (2) GREEN_LED_ON;
    // Read:   Because of the delay between output to input
    //         the old value of GPIO16 (zero) is read
    // Modify: Changes GPIO17 to a 0
    // Write:  Writes back GPADAT with GPIO16 = 0 and GPIO17 = 0
    delay_loop();

    // Make LED Red
    GpioDataRegs.GPADAT.bit.GPIO16 = 0; // (3) RED_LED_ON;
    GpioDataRegs.GPADAT.bit.GPIO17 = 1; // (4) GREEN_LED_OFF;
    delay_loop();
}

```

Example 19. Using GPxSET and GPxCLEAR Registers

```

/*****
* User's source file
*****/

for(;;)
{
    // Make LED Green
    GpioDataRegs.GPASET.bit.GPIO16 = 1; // RED_LED_OFF;
    GpioDataRegs.GPACLEAR.bit.GPIO17 = 1; // GREEN_LED_ON;
    delay_loop();

    // Make LED Red
    GpioDataRegs.GPACLEAR.bit.GPIO16 = 1; // RED_LED_ON;
    GpioDataRegs.GPASET.bit.GPIO17 = 1; // GREEN_LED_OFF;
    delay_loop();
}

```

6.2 Registers With Write 1-to-Clear Bits.

Some registers have what is called write 1-to-clear bits. This means that when the bit is set it can only be cleared by writing a value of one to the bit. During a read-modify-write operation, if a bit is one when it is read, then it will also be written as a one unless it is changed during the modify portion of the access. For this reason, it is likely a read-modify-write instruction will inadvertently clear a write 1-to-clear bit.

The CPU-Timer interrupt flag (TIF) within the TCR register is an example of a write 1-to-clear bit. TIF can be read to determine if the CPU-Timer has overflowed and flagged an interrupt. Example 20 shows code that stops the CPU-Timer and then checks to see if the interrupt flag is set.

Example 20. Read-Modify-Write Operation Inadvertently Modifies Write 1-to-Clear Bits (TCR[TIF])

| C-Source Code | Generated Memory | Assembly Instruction |
|--|---------------------|-------------------------|
| <code>// Stop the CPU-Timer</code> | | |
| <code>CpuTimer0Regs.TCR.bit.TSS = 1;</code> | 3F80C7 | MOVW DP,#0x0030 |
| | 3F80C9 | OR @4,#0x0010 |
| <code>// Check to see if TIF is set</code> | 3F80CB | TBIT @4,#15 |
| <code>if (CpuTimer0Regs.TCR.bit.TIF == 1)</code> | 3F80CC | SBF L1,NTC |
| <code>{</code> | 3F80CD | NOP |
| <code> // TIF set, insert action here</code> | 3F80CE | L1: |
| <code> // NOP is only a place holder</code> | | |
| <code> asm(" NOP");</code> | | |
| <code>}</code> | | |

The test for TIF in Example 20 will never be true even if an interrupt has been flagged. The OR assembly instruction to set the TSS bit performs a read-modify-write operation on the TCR register. If the TIF bit is set when the read-modify-write operation occurs, then TIF will be read as a 1 and also written back as a 1. The TIF bit will always be cleared as a result of this write. To avoid this, the write to TIF bit always be 0. The TIF bit ignores writes of 0, thus, its value will be preserved. One possible implementation that preserves TIF is shown in Example 21.

Example 21. Using a Shadow Register to Preserve Write 1-to-Clear Bits

| C-Source Code | Generated Memory | Assembly Instruction |
|---|---------------------|-------------------------|
| <code>union TCR_REG shadowTCR;</code> | | |
| <code>// Use a shadow register to stop the timer</code> | | |
| <code>// and preserve TIF (write 1-to-clear bit)</code> | | |
| <code>shadowTCR.all = CpuTimer0Regs.TCR.all;</code> | 3F80C7 | MOVW DP,#0x0030 |
| <code>shadowTCR.bit.TSS = 1;</code> | 3F80C9 | MOV AL,@4 |
| <code>shadowTCR.bit.TIF = 0;</code> | 3F80CA | ORB AL,#0x10 |
| <code>CpuTimer0Regs.TCR.all = shadowTCR.all;</code> | 3F80CB | MOVL XAR5,#0x000C00 |
| | 3F80CD | AND AL,@AL,#0x7FFF |
| <code>// Check the TIF flag</code> | 3F80CF | MOV *+XAR5[4],AL |
| <code>if(CpuTimer0Regs.TCR.bit.TIF == 1)</code> | 3F80D0 | TBIT *+XAR5[4],#15 |
| <code>{</code> | 3F80D1 | SBF L1,NTC |
| <code> // TIF set, insert action here</code> | 3F80D2 | NOP |
| <code> // NOP is only a place holder</code> | 3F80D3 | L1: |
| <code> asm(" NOP");</code> | | |
| <code>}</code> | | |

The content of the TCR register is copied into a shadow register. Within the shadow register the TSS bit is set, and the TIF bit is cleared. The shadow register is then written back to TCR; the timer is stopped and the state of TIF is preserved. The assembly instructions were generated with optimization level -o2 enabled.

6.3 Register Bits Requiring a Specific Value

Some registers have bits that must be written as a specific value. If this value is different from the value the bits read, then a read-modify-write operation will likely write the incorrect value.

An example is the watchdog check bit field (WDCHK) in the watchdog control register. The watchdog check bits must be written as 1,0,1; any other value is considered illegal and will reset the device. Since these bits always read back as 0,0,0, a read-modify-write operation will write 0,0,0 unless WDCHK is changed during the modify portion of the operation.

Another solution is to avoid the read-modify-write operation and instead only write a 16-bit value to the WDCR register. To remind you of this requirement, a bit field definition is not provided for the WDCR register in the C/C++ Header Files and Peripheral Examples. Registers that do not have bit-field nor union definitions are accessed without the .bit or .all designations as shown in Example 22.

Example 22. Watchdog Check Bits (WDCR[WDCHK])

```

/*****
 * User's source file
 *****/

SysCtrlRegs.WDCR = 0x0068;
    
```

See the *TMS320x280x, 2801x, 2804x DSP System Control and Interrupts Reference Guide (SPRU712)* and *TMS320x281x System Control and Interrupts Reference Guide (SPRU078)* for more information on the watchdog module.

6.4 Read-Modify-Write Sensitive Registers

Table 4 lists registers that are sensitive to read-modify-write instructions. Depending on the register and how the peripheral is used in the application, effects of a read-modify-write operation may or may not be a concern. This list may not be complete.

Table 4. Read-Modify-Write Sensitive Registers

| Module | Register(s) | Comments | |
|-----------------------------------|--|--|--|
| Watchdog | SCSR | WDOVERRIDE is a write 1-to-clear bit and always reads back as a 1. | |
| | WDCR | WDCHK must be written as 1,0,1 and always read back as 0,0,0. | |
| | WDCR | WDFLG is a write 1-to-clear bit. | |
| CPU-Timer | TCR | Timer interrupt flag (TIF) is a write 1-to-clear bit. | |
| GPIO | GPxDAT | Use this register to read data and instead use the SET/CLEAR and TOGGLE registers to change the state of GPIO pins. | |
| PIE | PIEIFRx | To clear PIEIFR bits, do not write to the PIEIFR register. Instead map the interrupt to a "pseudo" interrupt and service it. That is, let the hardware clear the interrupt flag otherwise interrupts from other peripherals may be missed. | |
| | PIEACKx | The PIEACK bits are write 1-to-clear bits. | |
| Event Manager (EV) ⁽¹⁾ | CAPCONA | CAPCONB | CAPRES is a write-0-to-reset bit and always reads back as 0. |
| | CAPFIFOA | CAPFIOB | If a write occurs at the same time that a CAPxFIFO status bit is being updated, the write data takes precedence. Thus if the bit changes between the read and the write phase of a read-modify-write instruction, the new bit value may be lost. |
| | EVAIFRA/B/C | EVBIFRA/B/C | The EV interrupt flags are all write 1-to-clear bits. |
| eCAN | CANTRS | CANTRR | The eCAN module can change the state of a bit between the time the register is read and the time it is written back. |
| | CANTA CANRMP CANRFP CANGIFO CANTOS | CANAA CANRML CANES CANGIF1 | These registers contain one or more write 1-to-clear bits. |
| | SPI | SPIST | Contains write 1-to-clear bits. |
| | I ² C | I2CSTR | Contains write 1-to-clear bits. |

⁽¹⁾ The EV module is available on TMS320x281x devices only.

7 A Special Case: eCAN Control Registers

Access to peripherals occur on one of three peripheral frames (or busses). Peripheral registers are located in the frame capable of accesses that best fit the register set.

- **Peripheral frame 0:**
Peripherals within this frame are on the device's memory bus. This bus is capable of both 16-bit or 32-bit accesses. For example, CPU-Timers are on the memory bus.
- **Peripheral frame 1:**
Peripheral frame 1 uses a bus that is capable of both 16-bit and 32-bit accesses. Examples include the ePWM and eCAN peripherals.
- **Peripheral frame 2:**
Peripheral frame 2 uses a bus that is capable of only 16-bit accesses. All of the peripheral registers on frame 2 are only 16-bits in length. Examples include the SCI, SPI, ADC and I²C.

The eCAN control and status registers are limited to 32-bit-wide accesses. Accesses of only 16 bits can yield unpredictable results. The eCAN control and status registers must be handled as a special case; they are the only peripheral frame 1 registers limited to 32-bit wide accesses.

Often the compiler will reduce an access to 16-bits if it will save code size or improve performance. Care must be taken to make sure what appears to be a 32-bit access to the eCAN control and status registers is not simplified to a 16-bit access by the compiler. For example, the compiler has reduced the access shown in Example 23 to a 16-bit access to half of the CANMC register.

Example 23. Invalid eCAN Control Register 16-Bit Write

| C-Source Code | Generated Memory | Assembly Instruction |
|--|---------------------|-------------------------------|
| <code>// The compiler will simplify this to</code> | <code>3F81FA</code> | <code>EALLOW</code> |
| <code>// a 16-bit read-modify-write</code> | <code>3F81FB</code> | <code>MOVW DP, #0x0180</code> |
| <code>EALLOW;</code> | <code>3F81FD</code> | <code>OR @20, #0x2000</code> |
| <code>ECanaRegs.CANMC.bit.SCB = 1;</code> | <code>3F81FF</code> | <code>EDIS</code> |
| <code>EDIS;</code> | | |

To force 32-bit accesses, the bit-field definitions and read-modify-write operations must not be used. The register must be read and written using the `.all` member of the union definition and all 32-bits must be read or written.

Unfortunately, not using bit fields or read-modify-write operations reduces the code readability. One solution is to read the entire register into a shadow register, manipulate the value, and then write the new 32-bit value to the register using `.all`. The code in Example 24 uses a shadow register to force a 32-bit access. If more than one register is going to be accessed, then the whole eCAN register file can be shadowed (i.e., `struct ECAN_REGS shadowECanaRegs;`).

Example 24. Using a Shadow Register to Force a 32-Bit Access

| C-Source Code | Generated Memory | Assembly Instruction |
|---|---------------------|-------------------------------|
| <code>// Use a shadow register to force a</code> | | |
| <code>// 32-bit access</code> | | |
| <code>union CANMC_REG shadowCANMC;</code> | | |
| <code>EALLOW;</code> | <code>3F81FA</code> | <code>EALLOW</code> |
| | <code>3F81FB</code> | <code>MOVW DP, #0x0180</code> |
| <code>// 32-bit read of CANMC</code> | <code>3F81FD</code> | <code>MOVL ACC, @20</code> |
| <code>shadowCANMC.all = ECanaRegs.CANMC.all;</code> | <code>3F81FE</code> | <code>OR @AL, #0x2000</code> |
| <code>shadowCANMC.bit.SCB = 1;</code> | <code>3F8200</code> | <code>MOVL @20, ACC</code> |
| | <code>3F8201</code> | <code>EDIS</code> |
| <code>// 32-bit write of CANMC</code> | | |
| <code>ECanaRegs.CANMC.all = shadowCANMC.all;</code> | | |
| <code>EDIS;</code> | | |

8 References

The following references include additional information on topics found in this application report:

- *C281x C/C++ Header Files and Peripheral Examples* ([SPRC097](#))
- *C2834x C/C++ Header Files and Peripheral Examples* ([SPRC892](#))
- *C280x, C2801x C/C++ Header Files and Peripheral Examples* ([SPRC191](#))
- *C2804x C/C++ Header Files and Peripheral Examples* ([SPRC324](#))
- *C2833x/C2823x C/C++ Header Files and Peripheral Examples* ([SPRC530](#))
- *2802x C/C++ Header Files and Peripheral Examples* ([SPRC832](#))
- *TMS320C28x CPU and Instruction Set Reference Guide* ([SPRU430](#))
- *TMS320C28x Optimizing C/C++ Compiler User's Guide* ([SPRU514](#))
- *TMS320C28x Assembly Language Tools User's Guide* ([SPRU513](#))
- *TMS320x281x System Control and Interrupts Reference Guide* ([SPRU078](#))
- *TMS320x280x, 2801x, 2804x DSP System Control and Interrupts Reference Guide* ([SPRU712](#))
- *TMS320x281x Serial Communications Interface (SCI) Reference Guide* ([SPRU051](#)).

For peripheral guides specific to your device refer to *TMS320x28xx, 28xxx DSP Peripherals Reference Guide* ([SPRU566](#))

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated